

EASY REFRIGERATED COUNTERS

Specifications:

- Made of AISI 304
- Self evaporating tray
- Extractable compressor
- Climatic class T
- Shelves can be fitted in 3 positions at a distance of 160 mm

Internal supply:

- 1 plastic covered shelve GN 1/1 per door


Options:





- Kit of wheels

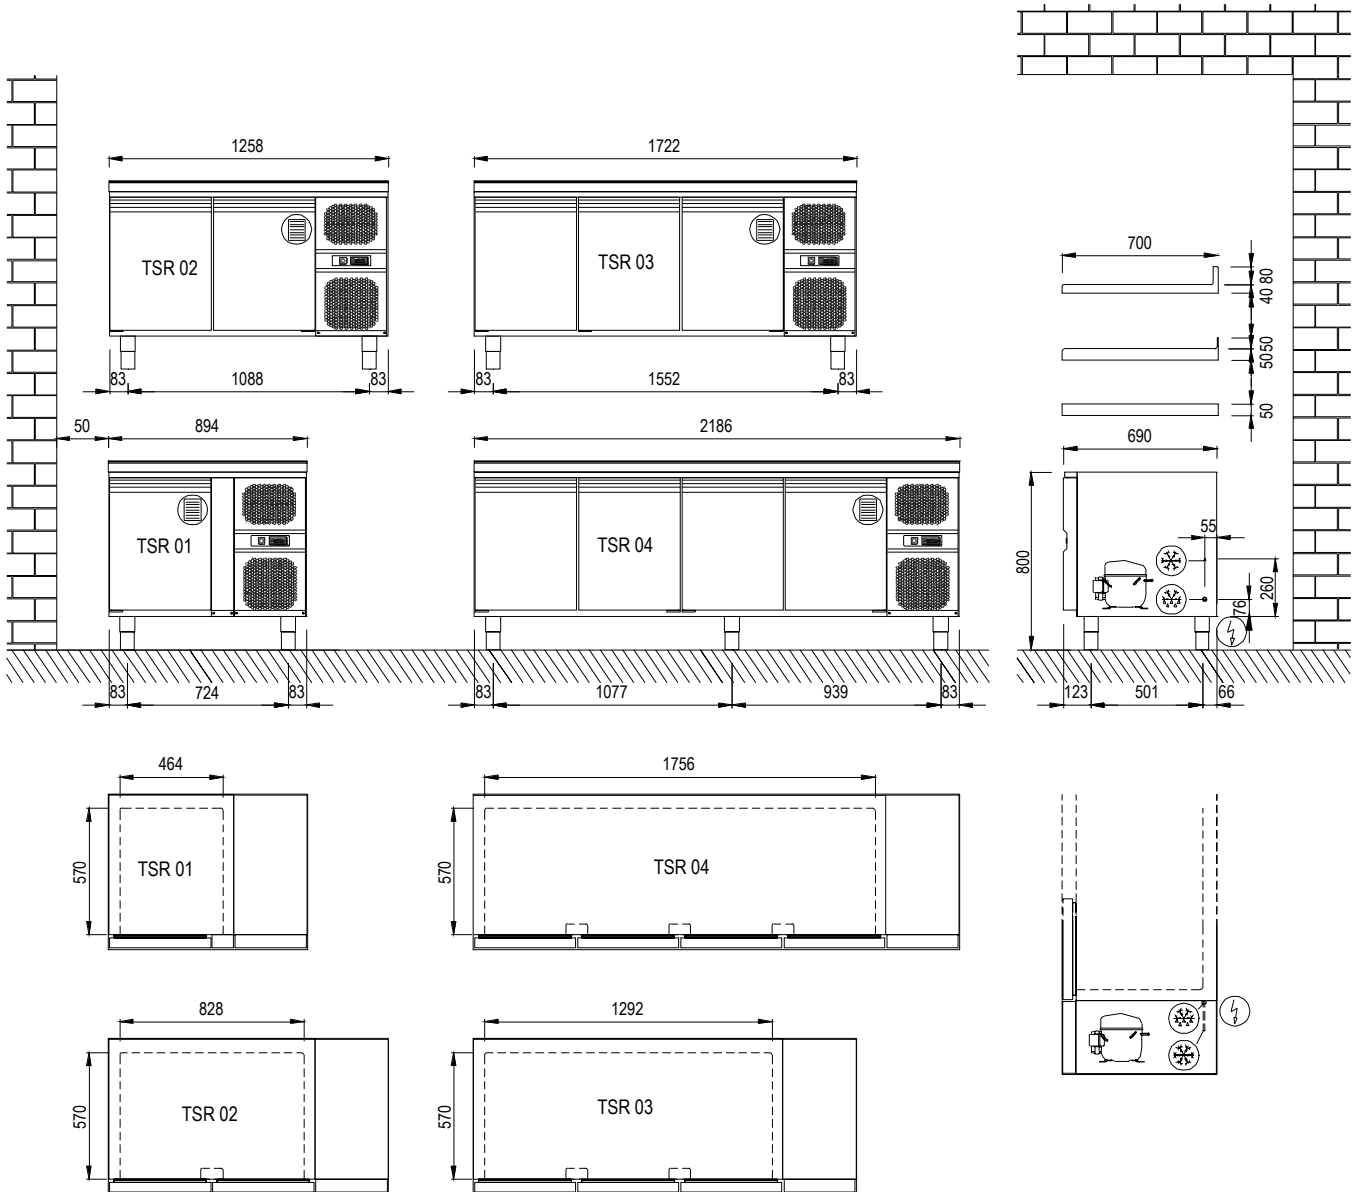

TSR		01	02	03	04
DIMENSIONS AND CAPACITY					
External Dimensions not plane					
Width x Depth x Height *	mm	894 x 690 x 800	1258 x 690 x 800	1722 x 690 x 800	2186 x 690 x 800
* (legs H = 150 mm)					
Internal Dimensions					
Width x Depth x Height	mm	464 x 580 x 550	828 x 580 x 550	1292 x 580 x 550	1756 x 580 x 550
Nominal gross volume	Lt	145	261	406	551
TECHNICAL DATA					
Standard voltage	V	230/1/50			
Power of compressor (Cecomaf -30+55 ①; -20+55 ②)	W	188 ①	352 ②	409 ①	550 ②
Working temperature	°C	-2 / +8			
Refrigerant-control device	Capillary				
Refrigerant system	Evaporator in the monobloc structure / Ventilated				
Type of defrost	Hot gas				
Defrost per day / Defrost duration time (min)	6 / 30				
Condenser fan	Model	Elco			
Fan	N° / Ø	1 / 230			
Refrigerating capacity	W	10			
Evaporator fan	Model	Costech			
Fan	N° / Ø	1 / 90	2 / 90	3 / 90	
Refrigerating capacity	W	16			
Current absorbed during operation	A	2.3	2.4	3.6	4.0
Max current absorbed	A	3.2	3.5	4.0	4.0
Power absorbed during operation	W	320	380	600	685
Max power absorbed	W	650	600	700	700
Refrigerant type	R404A				
Quantity of refrigerant	gr	135	115	155	185
Heat emitted	W	320	325	600	880
Air capacity	m³/h	300			
Thermostat	Model	ID 974			
WEIGHT AND VOLUME					
Total Weight	Kg	105	150	195	255
Volume with package	m³	0.7	1.0	1.3	1.7

CONNECTIONS



 Refrigerant drain exit holes	 Condense water exit holes	 Position of serial number data	 Electric cables exit holes
---	--	---	---